

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60145325

Model :

NOVAIR 200 M-NA 5m cable

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature :

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa



Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body	Technopolymer
Impeller	Technopolymer
OR ring	NBR 70
Motor shaft	AISI 416
Ceramic bushing	AISI 303 + Ceramic
Motor casing	Stainless Steel (AISI 304)
Radial seal	NBR 70

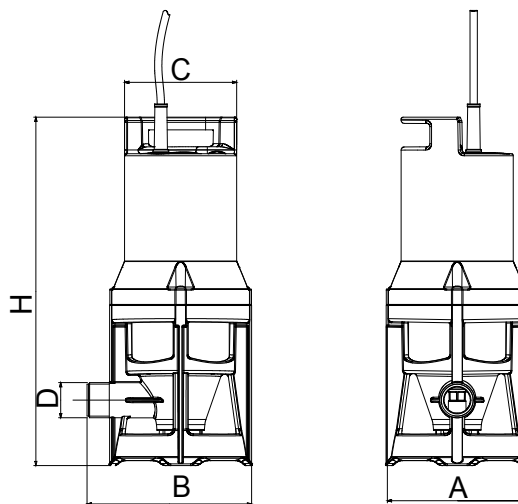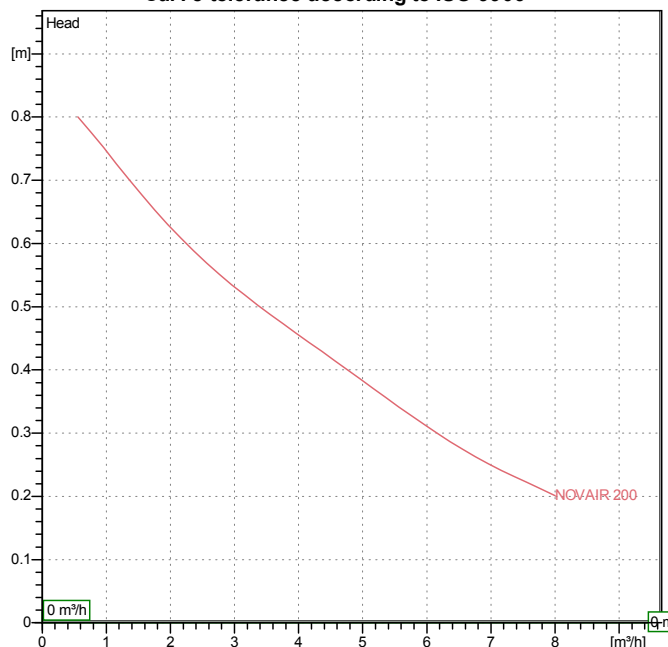Curve tolerance according to ISO 9906

Motor data
Weight : 3.5 kg

Motor brand :	DAB	50 Hz
Nominal power P2 :	0.18 kW	
Rated voltage :	1~ 220-240 V	
Nominal current :	1.4 A	
Number of poles :	2	
Rated speed :	2850 rpm	
Degree of protection :	IP 68	

Dimensions in mm

A	130.5				
B	158				
C	Ø 106				
D	1" G				
H	329.5				

Pump connection

Suction side : /
Discharge side : /


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVAIR 200 M-NA 5m cable

Curve tolerance according to ISO 9906


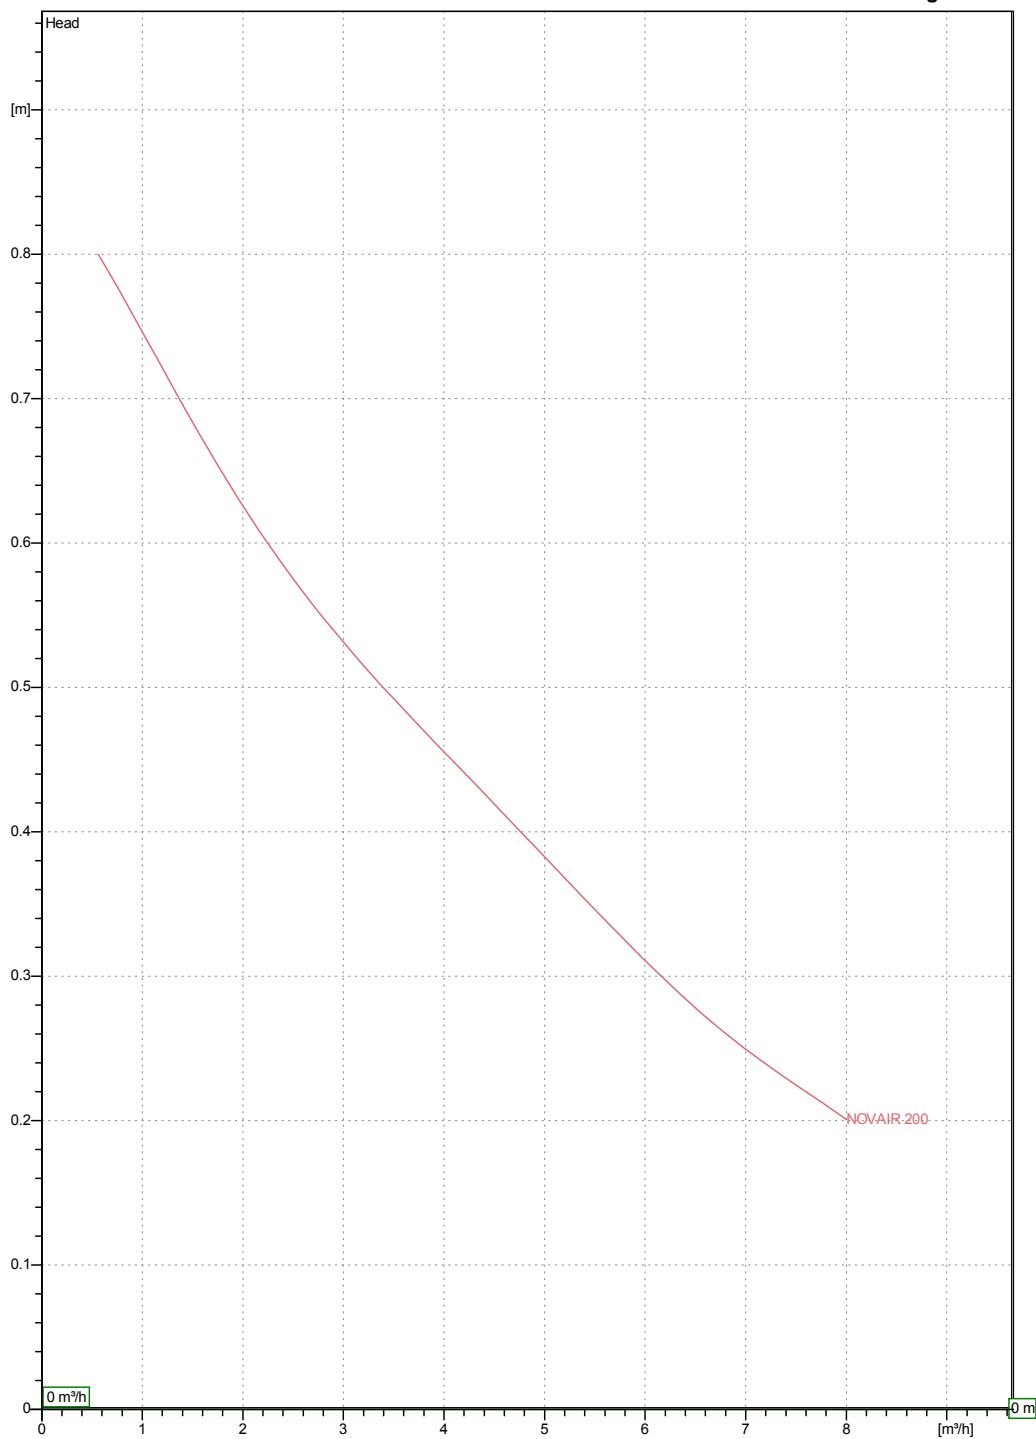


Hydraulic data (duty point)

Suction side :	Discharge side :	Flow : 0 m³/h	Head : 0 m	Rated speed : 2850 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Society
Reference
Address
Phone
Fax
E-mail

NOVAIR 200 M-NA 5m cable

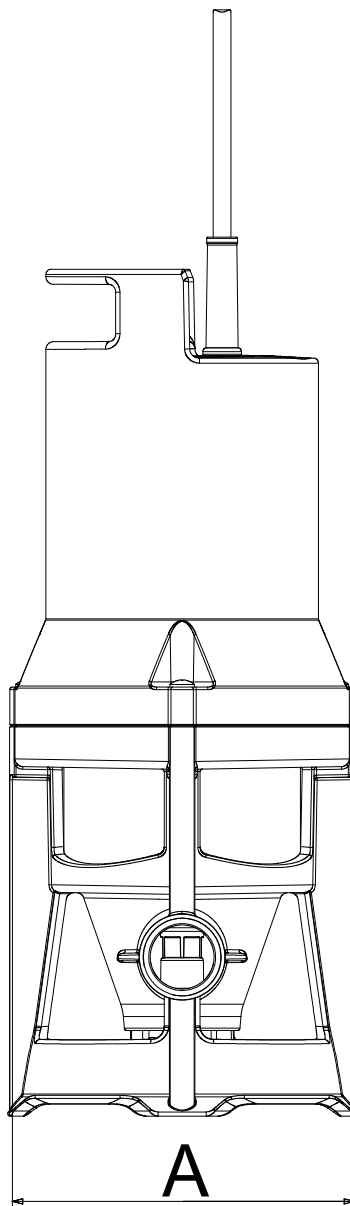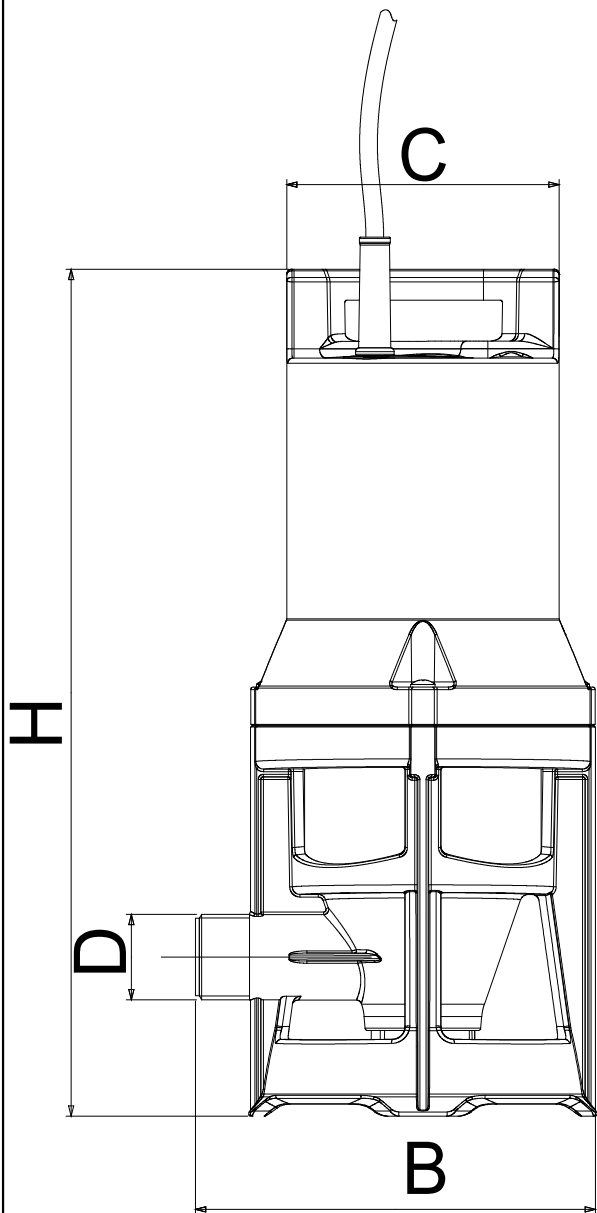

Dimensions in mm

1	A	130.5
2	B	158
3	C	Ø 106
4	D	1" G
5	H	329.5

Pump connection

Suction

Discharge

Project

Project ID

Created by

Created on

24/03/2016